

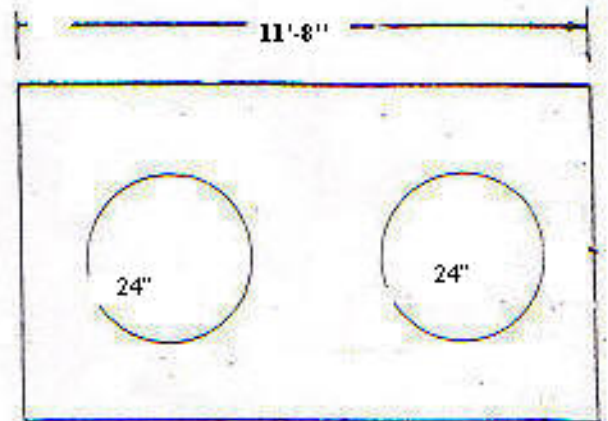


GREASE TRAP (3000 GAL.)

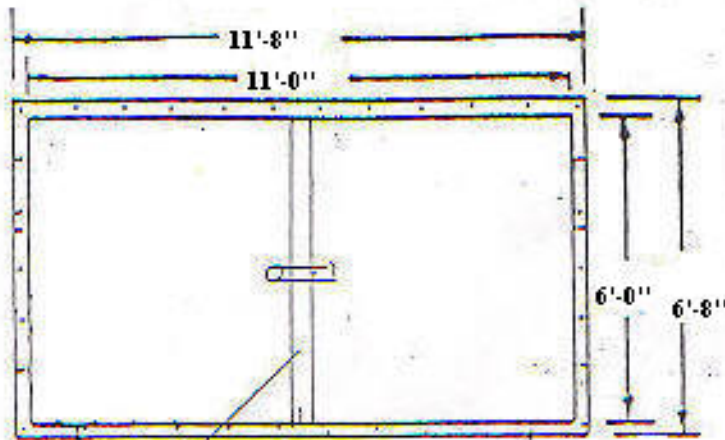


TOP VIEW

Wall
Omitted

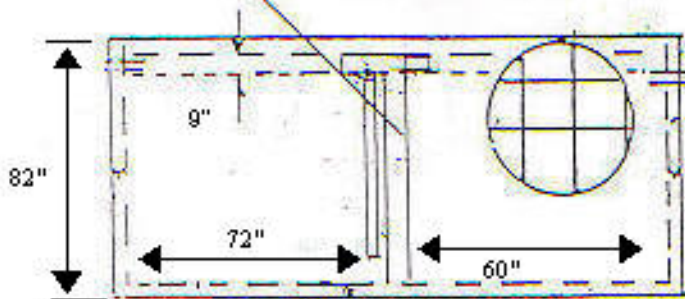

TOUNGE AND GROOVE
JOINT WITH BUTYL SEALENT

SIDE VIEW

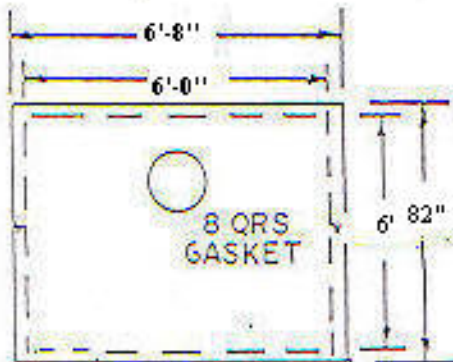

1. DRAWINGS ARE NOT TO SCALE
2. CABLE HOOKS ARE PROVIDED IN EACH SEC. FOR LIFTING.
3. CONCRETE DESIGNS INC. RECOMMENDS A MINIMUM OF 6" SAND OR GRAVEL BEDDING
4. SURFACE SHALL BE BROOMED OR FORM FINISHED
5. ALL SECTIONS SHALL BE SEALED WITH BUTYL SEALENT FOR WTER TIGHTNESS.

Concrete Designs, Inc.