

PUMP STATION (200 Gal.)



LID HAS NO.4 REBAR 12" O.C. w/6x6x10 WIRE MESH. FLAT TOP OPENINGS

VARY TO FACILITATE VARIOUS APPLICATIONS.

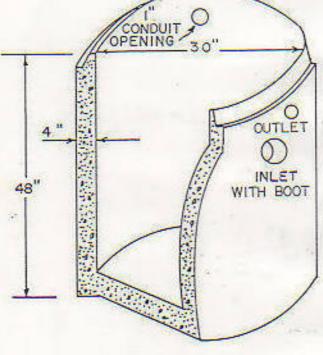

MESH.

4000 PSI CONCRETE AT 28 DAYS. BOTTOM AND TOP THICK-NESS ARE 5". OPENINGS PER OWNER SPECIFICATIONS. 1" BUTYL MASTIC JOINTS. INLET, OUTLET, AND CONDUIT OPENINGS BUILT TO SPEC-IFICATIONS. ADDITIONAL RISERS BUILT

IN I FOOT SECTIONS AS

REQUIRED .

PIPE HAS 6x6x10 WIRE

INVERTS VARY AS RE-QUIRED BY CONTRACTOR.

PIPE ACCESSES AND

NOT TO SCALE

